

Lifting column SC 1942 – 922.00001



Also available as a 2-leg base frame!

- Control box SCT2 MDT 100-240V - 124.22300
- Plate carrier SC/SM/SF – 115.00165
- Table foot SM/SF/SC/TM - 127.00545
- Telescopic crossbar - 127.00635

Lifting column SC 1942

Part No.: 922.00001

The lifting column **SC** consists of a colorless anodized aluminium guiding with plastic gliders. The inner profile is moved by an internal spindle drive. Up to 2 lifting columns can be connected to the LiteLine 2-channel control box 110-230V or up to 4 lifting columns to the LiteLine 4-channel control box 110-230V.

Technical Data

Max. load for 1 lifting column	1'500 N
Max. load for 2 lifting column	3'000 N
Max. load for 3 lifting column	3'000 N
Max. load for 4 lifting column	4'000 N
Max. tensile load per column	50 N
Max. static bending moment	Mbx _{stat} = 700 Nm Mby _{stat} = 400 Nm
Max. dynamic bending moment	Mbx _{dyn} = 200 Nm Mby _{dyn} = 150 Nm
Lifting speed	20 mm/s
Fitting length	645 mm
Stroke length	420 mm


The t-slots on two sides (width 8 mm) enable the attachment of crossbars, shelves or structures along the entire length of the lifting column.

Product line

«LiteLine»

Offers starting April 2025

Delivery starting Oktober 2025

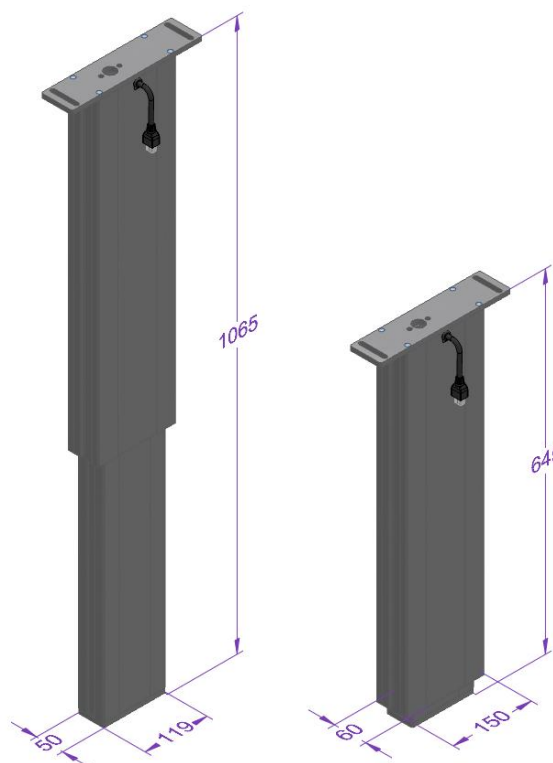

Download CAD Data at www.ergoswiss.com

Matching accessories:

Lifting column SC

- 115.00165 – Table plate support SM/SC/TM kpl.
- 127.00634 – Telescopic cross bar T8 550-950
- 127.00635 – Telescopic cross bar T8 900-1550
- 127.00560 – Table foot SM/SF/SC/TM 580 kpl.
- 127.00545 – Table foot SM/SF/SC/TM 680 kpl.
- 113.00053 – Castor SM/SC/TM 125 kpl.
- 126.00132 – Foot plate SM/SC/TM 200x60 slotted

Control box SCT MDT 100-240V

All SCT hand switches and foot switches

- 124.00290 – Extension cable hand switch SCT 1m
- 124.00137 – Extension cable motor SCT/Compact 1.2m
- 124.00279 – Control cable SCT

Note: SCT MDT has no SYNC or safety strip connection.